


NITE BRITES

JOB NAME _____

TYPE _____

BIS-RLM SERIES - GABRIELLE

50-175 watt Metal Halide
35-150 watt High Pressure Sodium
26-60 watt Compact Fluorescent
18 watt LED



The RLM Series offers unique designs and old standards to enhance the aesthetic appeal of restaurants, retail stores, businesses, and other areas where decorative reflector units are desired.

ORDERING MATRIX

SAMPLE CATALOG NUMBER: BISO70MXX-GAB-GEB-LB

BIS			XX	GAB			
FAMILY BIS		LAMP SOURCE C - Compact Fluorescent M - Metal Halide S - High Pressure Sodium I - Incandescent L - LED		REFLECTOR GAB - Gabrielle		GUARD Blank - No Guard GU - Guard	
	WATTAGE		VOLTAGE		GLOBE		PAINT COLORS
	035 - 35 ²³ 050 - 50 ⁵ 070 - 70 100 - 100 150 - 150 175 - 175 ¹ 200 - 200 ⁹⁶ 26C - 26WCFL ⁷² 32C - 32WCFL ⁷² 42C - 42WCFL ⁷² 57C - 57WCFL ⁷² 60C - 60WCFL ⁷² 18W - 18W Neutral White 18A - 18W Amber 18B - 18W Blue 18G - 18W Green 18R - 18W Red		XX - Universal		Blank - No Globe GEC - Elongated Clear GEP - Elongated Prismatic GES - Elongated Sandblast (standard for LED) GEO - Elongated Opal GRO - Round Opal (100W max. incandescent & 26C only) GFO - Flat Opal (100W max. incandescent only) GEA - Elongated Amber GEB - Elongated Blue GER - Elongated Red GEG - Elongated Green		WT - White BK - Black BZ - Bronze GY - Gray AL - Aluminum GV - Galvanized SY - Sunflower Yellow FR - Fire Red LB - Cornflower Blue DB - Deep Ocean Blue FG - Forest Green GB - Gloss Black CP - Metallic Copper BM - Metallic Bronze NK - Metallic Nickel GS - Greystone BS - Brownstone

Footnotes:

- ¹Metal Halide only.
- ⁵DT only.
- ²³120V High Pressure Sodium Only.
- ⁷²Compact Fluorescent Only.
- ⁹⁶Incandescent Only.

General Notes:


- All options are factory installed.
- Medium base lamp only.
- GX24q lamp base for 26-57W compact fluorescent.
- 2G8 lamp base for 60W compact fluorescent.
- All accessories are field installed.


Warning: Refer to and follow the lamp manufacturer's warnings and instructions.

ACCESSORIES (order separately)


For additional descriptions of accessories, refer to sheet numbers DC-47900 and DC-47910.

DIMENSIONS

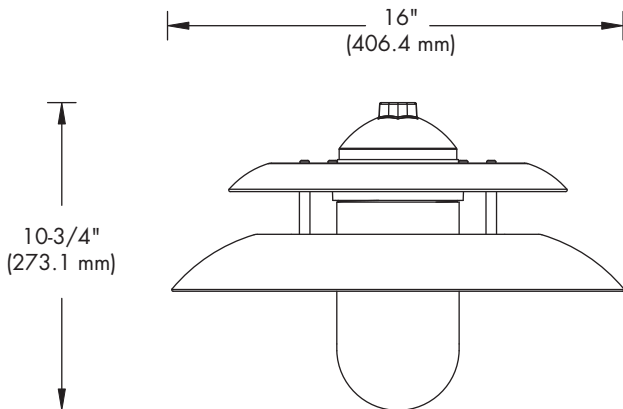


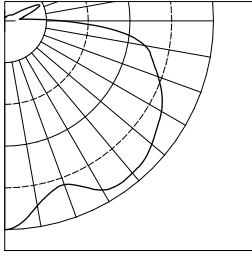


BIS100IXX-GAB-GEP
TEST NUMBER: 26245
LAMP: 100W A19
LUMENS: 1,680
MOUNTING HEIGHT: 12 FEET

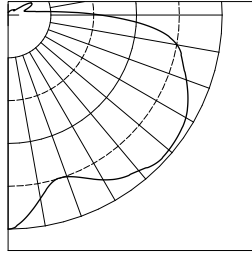





BIS175MXX-GAB-GEP
TEST NUMBER: 26238
LAMP: 175W MH, COATED
LUMENS: 15,000
MOUNTING HEIGHT: 12 FEET

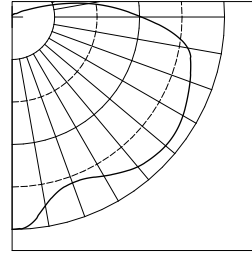

BIS42CCXX-GAB-GEP
TEST NUMBER: 26289
LAMP: 42W CFL
LUMENS: 3,200
MOUNTING HEIGHT: 12 FEET

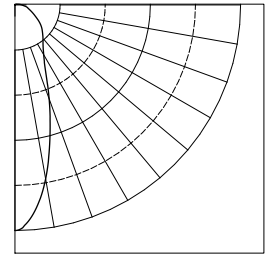

BIS18WLXX-GAB-GES
TEST NUMBER: 27584
LAMP: 18W LED NEUTRAL WHITE
LUMENS: 700
MOUNTING HEIGHT: 12 FEET

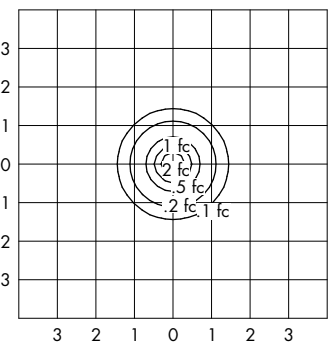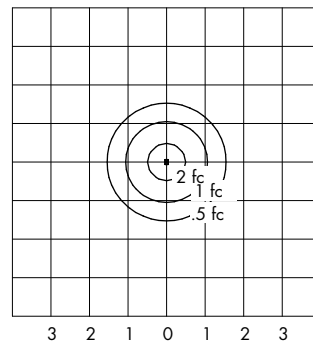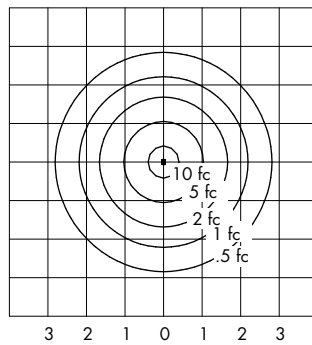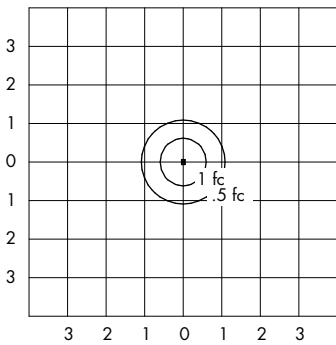

UNITS SHOWN IN TERMS OF MOUNTING HEIGHT
INITIAL FOOTCANDLES SHOWN

PRODUCT FEATURES

- UL 1598 Listed for wet location and 25°C ambient for all lamp wattages listed.
- 1. 1/2" NPT threaded hub for easy, positive mounting.
- 2. Die cast aluminum pendant mount assembly with polyester powder finish.
- 3. Spun aluminum reflector assembly with polyester powder finish.
- 4. Optional heat and shock resistant glass optical.
- 5. Optional die cast aluminum guard with polyester powder finish. (Not shown)

